


GENERATOR SET TECHNICAL SHEET

PAUWAY

Model: PWP900-60

440V | 60Hz | 1800RPM

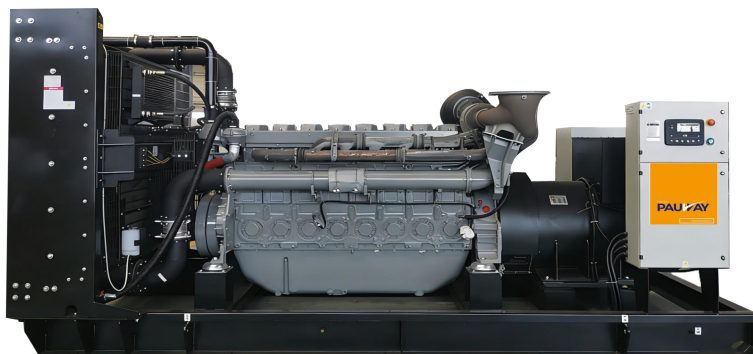

ENGINE	Perkins 4006-23TAG3A	ALTERNATOR	LEROY-SOMER TAL A49 B
PRP PRIME POWER	680kW 850kVA	ESP STANDBY POWER	748kW 935kVA

Specifications are subject to change without notice.

GENERAL FEATURES

GB/T 2820 (ISO 8528)

- I 40°C radiator, fans are driven by belt, with safety guard
- I Alternator: single bearing, IP23, insulation class H
- I Standard control panel
- I Lead-acid batteries, rack and cables
- I Vibration damper
- I Dry type air filter, fuel filter & oil filter
- I 24V charging alternator
- I Exhaust bellows, elbows, flange & muffler
- I User manual

Standard Configuration (open type)

Overall Dimensions: 3965×1710×2200mm
Weight: 5300kg

Soundproof Type

Overall Dimensions: 5900×2000×2600mm
Weight: 6500kg

Standard 20'ft GP container

Overall Dimensions: N/A
Weight: N/A

OPTIONS

- | | | | |
|----------------------|------------------|-------------------------------|---------------------------------|
| ◇ Different Voltage | ◇ Charging | ◇ Cylinder Liner Water Heater | ◇ Condensate drain heater |
| ◇ Soundproof type | ◇ Rainproof type | ◇ Trailer type | ◇ Automatic transfer switch |
| ◇ Paralleling system | ◇ Switchgear | ◇ Spare parts | ◇ Auto oil replenishment system |
| ◇ Daily fuel tank | ◇ Base fuel tank | | |

WAY TO

P – Pioneering Power Solutions

A – Advanced and Assured

U – Unparalleled Versatility

www.pauway.cn / sales@pauway.cn / +86-22-86859198

GENERATOR SET TECHNICAL SHEET



Model: PWP900-60

440V | 60Hz | 1800RPM

SALES PROMISES

- All products are brand-new, with each unit subject to strict factory inspection.
- Warranty: 1 year from commissioning completion, 1,000 cumulative operating hours, or 15 months from shipment to Pauway Tianjin Manufacturing Base (for unused units) — whichever occurs first.
- Extended warranty: Available upon inquiry; provided by PAUWAY or its authorized agents.

GENERATOR RATINGS

Voltage V	Hz	Phase	PF ($\cos \Phi$)	Standby Amps	Prime Ratings	Standby Ratings
480/277	60	3	0.8	1125	680kW	748kW
440/254	60	3	0.8	1127	680kW	748kW
416/240	60	3	0.8	1298	680kW	748kW
380/220	60	3	0.8	1420	680kW	748kW

I High voltage (optional): 6.6kV / 13.8kV (Special voltages customizable)

GENERATING SET DATA

Voltage setting range	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation / 100% sudden reduction	$\leq 25\%$
Transient voltage deviation / sudden increase	$\leq -20\%$
Voltage stabilization time / 100% sudden reduction (s)	≤ 6
Voltage stabilization time / sudden increase (s)	≤ 6
Frequency drop	$\leq 5\%$
Steady-state frequency drop	$\leq 1.5\%$
Transient frequency deviation / 100% sudden reduction	$\leq 12\%$
Transient frequency deviation / sudden increase	$\leq -10\%$
Frequency recovery time / 100% sudden reduction (s)	≤ 5
Frequency stabilization time / sudden increase (s)	≤ 5

WAY TO

P – Pioneering Power Solutions

A – Advanced and Assured

U – Unparalleled Versatility

www.pauway.cn / sales@pauway.cn / +86-22-86859198

GENERATOR SET TECHNICAL SHEET



Model: PWP900-60

440V | 60Hz | 1800RPM

ENGINE SPECIFICATION

4006-23TAG3A

Manufacturer / Model	Perkins-4006-23TAG3A
Prime Power	705kW
Standby Power	786kW
Rated speed (r/min)	1800
No.Cylinder	6
Cylinder arrangement	L
Stroke	4
Air intake system	Turbocharged
Governor type	Electronic
Bore and stroke	160x190mm
Displacement	22.921L
Compression ratio	13.6: 1

Fuel System

Fuel consumption @ 100% (Prime Power) Load	210g/kWh	172L/h
Fuel consumption @ 75% (Prime Power) Load	210g/kWh	131L/h
Fuel consumption @ 50% (Prime Power) Load	213g/kWh	91L/h

Exhaust System

Exhaust gas flow (L/S)	3217
Exhaust temperature (°C)	500
Max back pressure (kPa)	6

Air Intake System

Combustion air flow (L/S)	1150
Air flow required for radiator	
Air Intake System	Air filter & exhaust turbocharging

Oil System

Oil System	Oil filter、Oil pump、Oil dipstick
Total oil capacity (L)	113.4
Oil consumption (g/kWh)	≤0.25% of fuel consumption

Cooling System

Cooling Type	Water-cooled
Intercooling method	Air-Air
Cooling System	Thermostat、Water pump、Radiator、Intercooler
Coolant capacity(L)	120
Max water temperature (°C)	98

WAY TO

P – Pioneering Power Solutions

A – Advanced and Assured

U – Unparalleled Versatility

www.pauway.cn / sales@pauway.cn / +86-22-86859198

GENERATOR SET TECHNICAL SHEET



Model: PWP900-60

440V | 60Hz | 1800RPM

ALTERNATOR SPECIFICATION

Power (kVA)	860
Power (kW)	688
Alternator Efficiency(%)	94.8
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
THF	<2%

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

·Note: Generator parameters may vary depending on brand, voltage level and other factors

Control Functions

Main functions

4-line text display	6 customizable output channels
Multi-language display	4 customizable analog/digital input channels
5 menu navigation keys	Supports 0-10V or 4-20mA sensors
LCD alarm indication	Speed detection via CAN, MPU and generator frequency
Customizable startup screen, text and screen saver	Built-in real-time clock (RTC)
Compatible with all expansion modules	Manual/automatic fuel pump control
Data logging	Engine pre-heating and post-heating
Built-in powerful PLC function	Built-in powerful PLC function
Emergency mode (all protections disabled)	Preset multiple start-stop cycles
Front panel editable parameters (with password protection)	Engine start/stop idle speed
Power-saving mode	Fuel level alarm
3-phase generator detection and protection	3 customizable maintenance reminders
3-phase mains detection and protection (PEC6.12 only)	Supports EFI engines, including Tier 4 engines
ATS switch control (PEC6.12 only)	Parameter setting via free DSE software
Unit current and power monitoring (kW, kvar, kVA, pf)	IP65 protection rating for better water resistance
Mains current and power monitoring (kW, kvar, kVA, pf)	Can read parameters of other devices via CAN communication
Overload protection	Supports J1939-75 CAN communication
Overcurrent protection	Shield EFI engine CAN alarms
Front panel manual control of circuit breaker closing/opening	1 set of backup protection parameters
Customizable fuel and start output ports for EFI engines	

WAY TO

P – Pioneering Power Solutions

A – Advanced and Assured

U – Unparalleled Versatility

www.pauway.cn / sales@pauway.cn / +86-22-86859198

GENERATOR SET TECHNICAL SHEET

PAUWAY

Model: PWP900-60

440V | 60Hz | 1800RPM

PAUWAY HIGHLIGHT

/// Efficiency

- Low consumption
- High reliability
- High quality power supply
- Long maintenance cycle

/// Support

- Provide global product warranty and technical

/// Standard

- The generator set is designed and manufactured in
- The engine used conforms to ISO 2008:9001 and
- The generator used conforms to NEMA MG1, EN and IEC standards

/// Rated power

- System Rating: power will vary with the change of alternator
- According to ISO 8528-5, the generator set conforms to G3
- According to ISO 8528-5, the generator set is allowed to use standby power

/// Performance assurance certification (PAC)

- Meeting ISO 8528-5 test transient response of genset
- Strong load carrying capacity at one time
- Product design, quality and performance
- All systems have been factory tested.


/// Provide full set of spare parts

- Control panel
- Circuit breaker/Power distribution
- Fuel system
- Exhausting system
- Fuel connection with shut-off valve mounted on base
- Starting / charging system
- Mechanical / electrical driven radiator system
- Suitable model of AC alternator

/// Certification

- CE certificate

NAMING PRINCIPLE

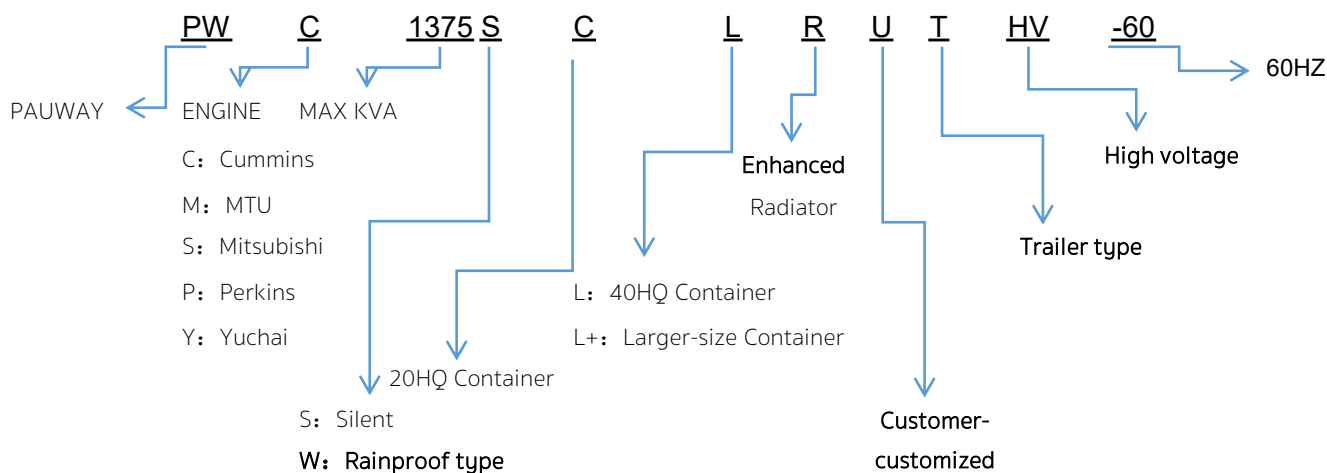

PAUWAY

TIANJIN PAUWAY POWER EQUIPMENT CO.,LTD
WEBSITE: WWW.PAUWAYPOWER.COM
EMAIL: SALES@PAUWAY.CN
TEL: +86-22-86859198